


Crane scale KERN HTS



NEW

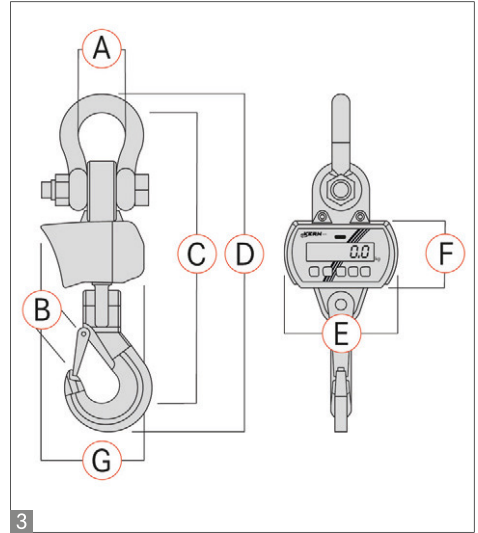

Robust industrial crane scale up to 10 t, with EC type approval [M]

Features

- With the TÜV certification mark, the scale meets the requirements of the standard EN 13155 (Non-fixed load lifting attachments) and EN 61010-1 (Electrical safety)
- Professional device for robust applications in production, quality control, logistics etc.
- Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- High mobility:** thanks to battery operation, compact construction and low weight, it is suitable for use in several locations (production, warehouse, dispatch department etc.)
- Range of tare: 100 % of [Max]
- Tare:** Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed

- Hook with safety catch**, non-revolving
- Infrared remote control** standard. Range up to 8 m. All functions can be selected. WxDxH 65x24x100 mm. Batteries included, 9 V

Additional functions:

- LED display with Gross/Tare/Net
- Charge status indicator visualised through LED
- Standby function: display automatically switched off after 5 min without a change of load. Automatic activation with the touch of a key

Technical data

- Superior display size: digit height 25 mm. Large backlit LCD display for easy reading of the weight, even from a distance or under poor lighting conditions
- Rechargeable battery pack internal, standard, operating time up to 100 hours with backlight, charging time approx. 12 h
- Precision: 0,1 % of [Max]
- Net weight approx. 20 kg
- Permissible ambient temperature -20 °C / 40 °C

STANDARD



OPTION



FACTORY



Model	Weighing range [Max] kg	Readout [d] = [e] g	Minimum load [Min] kg	3 Dimensions							Options				
				A	B	C	D	E	F	G	Verification		DAkkS Calibr. Certificate		
				mm	mm	mm	mm	mm	mm	mm	M KERN		DAkkS KERN		
KERN HTS 1T-4AM	1500	500	10	33,3	29	314,6	359,3	200	121	181		950-130H		963-130H	
HTS 3T-3AM	3000	1000	20	42,9	47	346,75	369,25	200	121	181		950-132H		963-132H	
HTS 6T-3AM	6000	2000	40	58	55	440	518,6	200	121	181		950-132H		963-132H	
HTS 10T-3AM	10000	5000	100	82,6	61	535,35	628,35	200	121	181		950-133H		963-133H	

Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible. Verification at the factory, we need to know the full address of the location of use.

KERN Pictograms

 Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).	 Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).	 Suspended weighing: Load support with hook on the underside of the balance.
 Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required.	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.	 Battery operation: Ready for battery operation. The battery type is specified for each device.
 Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation functions.	 Rechargeable battery pack: Rechargeable set.
 Data interface RS-232: To connect the balance to a printer, PC or network.	 Totalising level A: The weights of similar items can be added together and the total can be printed out.	 Mains adapter: 230V/50Hz in standard version for EU. On request GB, AUS or USA version available.
 RS-485 data interface: To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.	 Totalising level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation.	 Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 USB data interface: To connect the balance to a printer, PC or other peripherals.	 Strain gauges: Electrical resistor on an elastic deforming body.	 Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.
 Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Percentage determination: Determining the deviation in % from the target value (100 %).	 Electromagnetic force compensation: Coil inside a permanent magnet. For the most accurate weighings.
 WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Weighing units: Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 Single cell technology: Advanced version of the force compensation principle with the highest level of precision.
 Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.	 Weighing with tolerance range: Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.	 Verification possible: The time required for verification is specified in the pictogram.
 Interface for second balance: For direct connection of a second balance.	 Vibration-free weighing: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.	 DAkkS calibration possible: The time required for DAkkS calibration is shown in days in the pictogram.
 Network interface: For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram. For details see the glossary.	 Package shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: The balance displays the weight, date and time, regardless of a printer connection.	 ATEX explosion protection: Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.	 Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: With weight, date and time. Only with KERN printers, see "Accessories"	 Stainless steel: The balance is protected against corrosion.	 Warranty: The warranty period is shown in the pictogram.
 Piece counting: Reference quantities selectable. Display can be switched from piece to weight.		

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAkkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAkkS calibration laboratory today is one of the most modern and best-equipped DAkkS calibration laboratories for balances, test weights and force-measurement in Europe.

Your KERN specialist dealer:

Thanks to the high level of automation, we can carry out DAkkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAkkS calibration of balances with a maximum load of up to 6 t
- DAkkS calibration of weights in the range of 1 mg - 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAkkS calibration certificates in the following languages D, GB, F, I, E, NL